# BRAMAH

### cabinet locks for narrow stiles

#### **Common Applications**

- Retail Display Cabinets.
- Jewellery Stores.
- Museums and Galleries.
- Bespoke Cabinets.


#### **Bespoke Development**

 The CAB 17 NS lock was designed and built for installation in narrow stiles.

#### **Other Options**


- Other options are available. They include materials and finishing.
- Variations to the size of the standard back plate.
- Stamping with logos or decoration.
- Additional or alternative knurling on the cap.



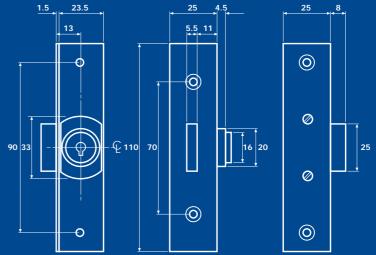

Options	CAB 17 NS
A1 - Back plate 110mm (w) x 25mm (h)	Standard
B1 - Vertical Throw	Standard
B2 - Left Handed Throw	Standard
B3 - Right Handed Throw	Standard
C1 - Hardened Steel Cap	To Order
C2 - Plain Brass Cap, with front turned down	Standard
C3 - Extended Caps	To Order
D1 - Brass Finish, highly polished	Standard
D2 - Chrome Finish, bright	Standard
D3 - Bronzed Finish	To Order

Options must be specified with each order



BRAMAH SECURITY EQUIPMENT LIMITED 31 OLDBURY PLACE LONDON W1U 5PT

ALPHA DIAL TELEPHONE 07000 BRAMAH or 07000 272624
TELEPHONE + 44 (0) 20 7486 1739 FACSIMILE + 44 (0) 20 7935 2779

E-MAIL lock.sales@bramah.co.uk WEB www.bramah.co.uk

## **BRAMAH**

#### **Made to Order Cabinet Locks**

#### **Background**

- The standard mechanical Bramah cabinet lock has been manufactured for over 200 years.
- The range today is our interpretation of what the market requires, in terms of all the critical measurements.
- Inevitably, with design aesthetics critical to retail branding, our choices are not always what is required.
- Bramah, therefore, offer to make standard cabinet locks to your design.
   For us to do this, we need your measurements from the standard lock drawing and check list.
- Please complete and return with your enquiry.
- Cost implications depend on variations to the standard design and volume.

#### **Geometry Checklist**

- A 25 mm Standard
- **B** 8 mm Standard Throw
- C mm minimum 45mm
- D mm minimum 22.5mm
- E 2 mm Standard
- F 20.5 mm Standard
- G 33 mm Standard
- H mm minimum 33mm
- I mm minimum 45mm
- J 5.5 mm Standard
- K mm minimum 23.5mm
- L 13.5 mm Standard
- M mm minimum 9.5mm

#### **Finishes**

Linished and lacquered brass Polished brass Satin chrome Bright chrome Bronze

#### **Options**

Left hand throw (enclose example)
Right hand throw (enclose example)
Vertical throw (illustrated below)
Knurled brass cap
Hardened steel cap
Stamping with logo or decoration

#### **Schematic Standard Lock**

